Visit part 1 – Local flood management plan drill (10:00 – 11:30)

- **10:00 – 10:30.** Visit to **low points** where flood starts in the village's center area.

  Visit to the **streamflow measuring station** in the Arga river. Level (m) and streamflow 10 minutes basis observations are used in the local plan.

- **10:30 – 11:30. Plan management drill** – submission of an alert warning to the population.



Paseo de la Mejana – low point in the right bank of the river, where flooding of the municipality starts.

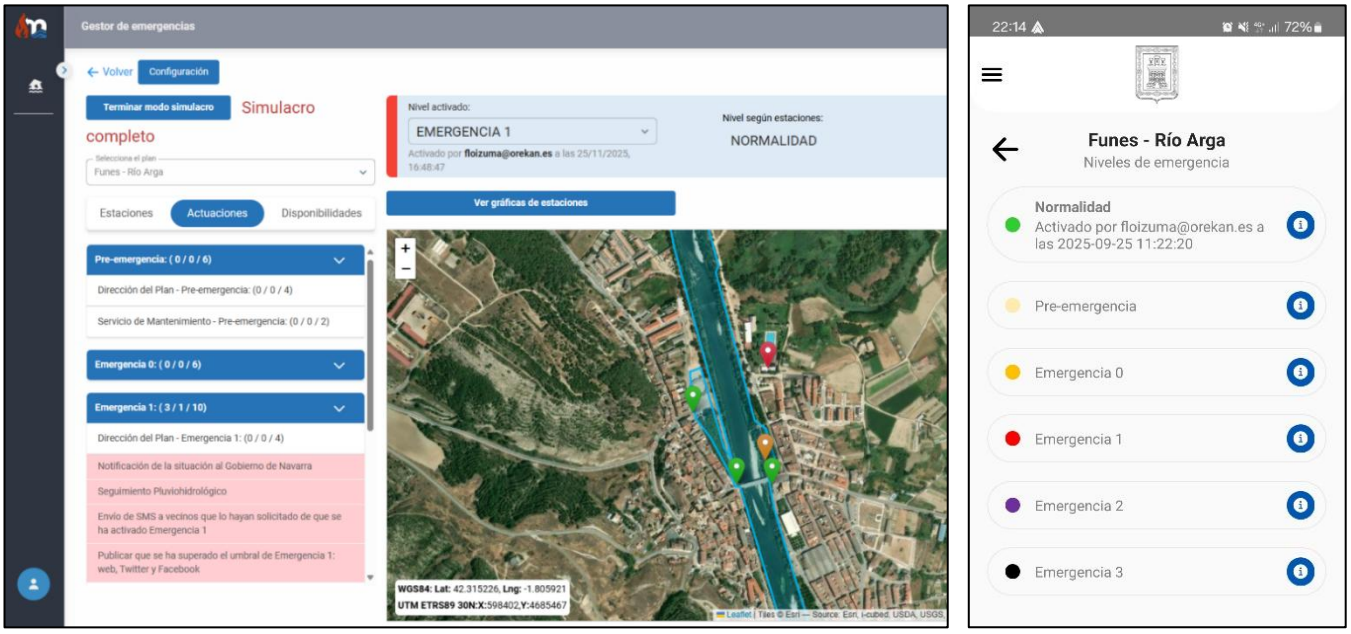


Image of the computer tool – computer based version (left) and App version (right) – for managing the flood risk emergency in the municipality of Funes. Both work fully synchronized.

Visit part 2 – Flood protection (11:30 – 12:00)

- **11:30 -12:00 Visit to actions financed by NextGeneration EU - Recovery and Resilience Mechanism.**

- 5.1 million euros in 34 infrastructure projects to prevent the effects of flooding in urban areas, currently being carried out in a total of 29 municipalities in Navarre.

- 4 of those projects are being developed in the municipality of Funes.

- Today we will visit 2 of them:

  – **Removal of the public swimming pools pumping system**. Moving it to a new location and moving it up from the basement where they were located.

  They needed to be removed when floods were expected. Safer for municipal workers.

  Changes in the local plan – modified during the annual meetings with the local plan managers (politicians, local police, local brigade, etc.).

  Grant: 400.000 euro.



MAGMA

PROYECTO DE REFORMA DE LA INSTALACIÓN DEL SISTEMA DE FILTRACION Y BOMBEO DE LAS PISCINAS MUNICIPALES DE FUNES
MEMORIA

- DF 23/2011 DE 28 DE MARZO POR EL QUE SE REGULA LA PRODUCCION Y GESTION DE LOS RESIDUOS DE LA CONSTRUCCION EN EL AMBITO DE LA COMUNIDAD FORAL DE NAVARRA.

1.5.- ESTADO ACTUAL Y SOLUCION ADOPTADA

Para conocer el estado actual de las instalaciones de Filtración y Bombeo de las Piscinas, se acompaña un reportaje fotográfico de las mismas;

ESTADO ACTUAL

EXTERIOR DE CASETA ACTUAL . PLANTA CALLE

Página 5

MAGMA

PROYECTO DE REFORMA DE LA INSTALACIÓN DEL SISTEMA DE FILTRACION Y BOMBEO DE LAS PISCINAS MUNICIPALES DE FUNES
MEMORIA

INTERIOR DE CASETA ACTUAL . PLANTA CALLE

EQUIPOS FILTRACION PISCINA GRANDE. PLANTA SOTANO

Página 6

– **Installation of temporal flood gates** in 4 public buildings.

Grant: 39.367,07 euro.

